



**CHANDLER**  
ENGINEERING

## Model 3000-CP-011


## Model 3000-CP-017

### Positive Displacement Pump Systems

The Model 3000-CP-011 is a high flow, large volume dual cylinder pump system, capable of operating in continuous flow or pressure modes at flow rates to 100ml/minute or pressure to 20,000 psi. Cylinders can also be operated independently in either flow or pressure modes. Designed for high temperature applications, the cylinders are mounted on a cart. The cart has locking castors, tool drawer, laptop computer shelf and a 1500 cc fluid reservoir capable of being pre-pressurized to 125 psi. A laptop computer is included, with PumpWorks software pre-loaded and configured. The pump system uses 1/4 inch ported coned and threaded high flow valves with adaptors to standard 1/8 fittings supplied.

This precision pump system is normally supplied with Chandler Engineering's Model 3000 PVT System, but is ideal for use in additional applications where the need for precision delivery or pressure control of high flow/high pressure fluids is required.

The system is based on our highly successful Quizix Pump Model 6000 Series Laboratory product line. It includes a Q6220 Dual Cylinder Pump. For additional details please see our Quizix Q6000 Metering Pumps Brochure and our PumpWorks Software Brochure.

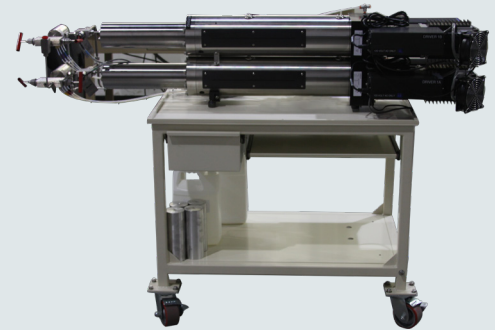

### FEATURES

- ✓ Continuous flow or pressure modes at flow rates to 100ml/min or pressure to 20,000 psi
- ✓ Operates independently in either flow or pressure modes
- ✓ Ideal for high temperature applications
- ✓ Laptop computer is included, with PumpWorks software pre-loaded and configured

# Model 3000-CP-011

# Model 3000-CP-017

## Specifications

### Q6220-HC Performance Specifications

Maximum Pressure Rating:  
20,000 psi

Maximum Flow Rate:  
100 ml/minute

Minimum Flow Rate  
0.00003 ml/minute

Flow Rate Accuracy:  
+/- 0.1% of set flow rate

Volume Accuracy:  
+/- 0.1% of volume dispensed

Volume Resolution:  
0.0000034 ml per step

Single Stroke Volume (Typical):  
125 ml

Pressure Accuracy:  
+/- 0.2% Full Scale

Pressure Resolution:  
0.002 psi (0.0004% FS)

Pressure Control Accuracy (Typical):  
+/-3 psi (0.02% FS)

Capable of Holding Vacuum for Filling:  
Yes

Temperature Rating:  
0 to 50°C or 50 to 200°C

### Physical Specifications

Wetted Materials  
Hastelloy C-276 or PH17-4

Piston Material:  
Zirconium Ceramic

Seal:  
UHMW-PE, Elgiloy, PEEK, VITON

Fluid Port Fitting:  
5/16" HIP Medium Pressure C&T



2001 North Indianwood Avenue, Broken Arrow, OK 74012  
Tel: +1 918-250-7200 • Fax: +1 918-459-0165  
e-mail: [chandler.sales@ametek.com](mailto:chandler.sales@ametek.com) • [www.chandlereng.com](http://www.chandlereng.com)

### Houston Sales and Services

4903 W. Sam Houston Parkway, N., Suite A-400, Houston, TX 77041  
Tel: +1 713-466-4900 • Fax: +1 713-849-1924